



SUBMITTAL DATA

TOP VIEW

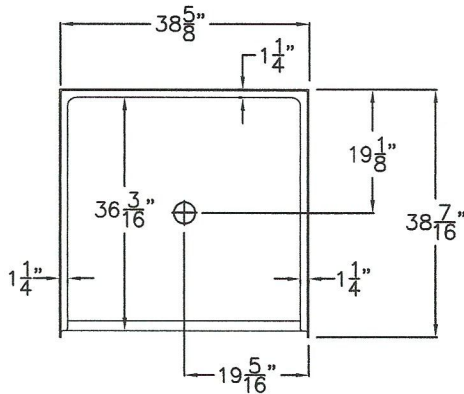

SIDE VIEW



Barrier Free Shower Pan


The shower pan shall be AB-3838 BF.

Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mils, and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimensions of 38 5/8" x 38 7/16" x 4 1/2". The one piece pan shall meet ANSI Z124.2, complies with CSA, NAHB, UPC, and shall meet the requirements of Southern Building Code.


The enclosure shall be equipped with the following installed accessories:

- 1) Low entry 1/2" threshold,
- 2) Factory installed Easy Base self sustaining bottom.

FRONT VIEW

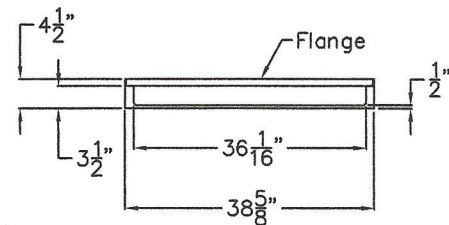

Detail of 1/2" Threshold

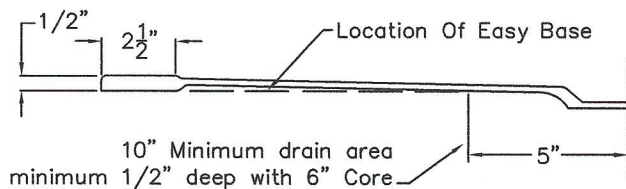

DUE TO THE NATURE OF THE MATERIALS INVOLVED UNIT DIMENSIONS MAY VARY ± 1/2 INCH